201901 VER 1.0

70W LED Parking Garage Canopy

Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design,high quality and better cooling for LED Tj < 85℃.
- Excellent Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)

Product Applications

GL LED Parking Garage Canopy series can be widely used in indoor or outdoor lighting(Wet location),Excellent for Museums, Art Galleries, Shopping Malls,Parking Gragre, Buildings,The lawn, and many more applications.

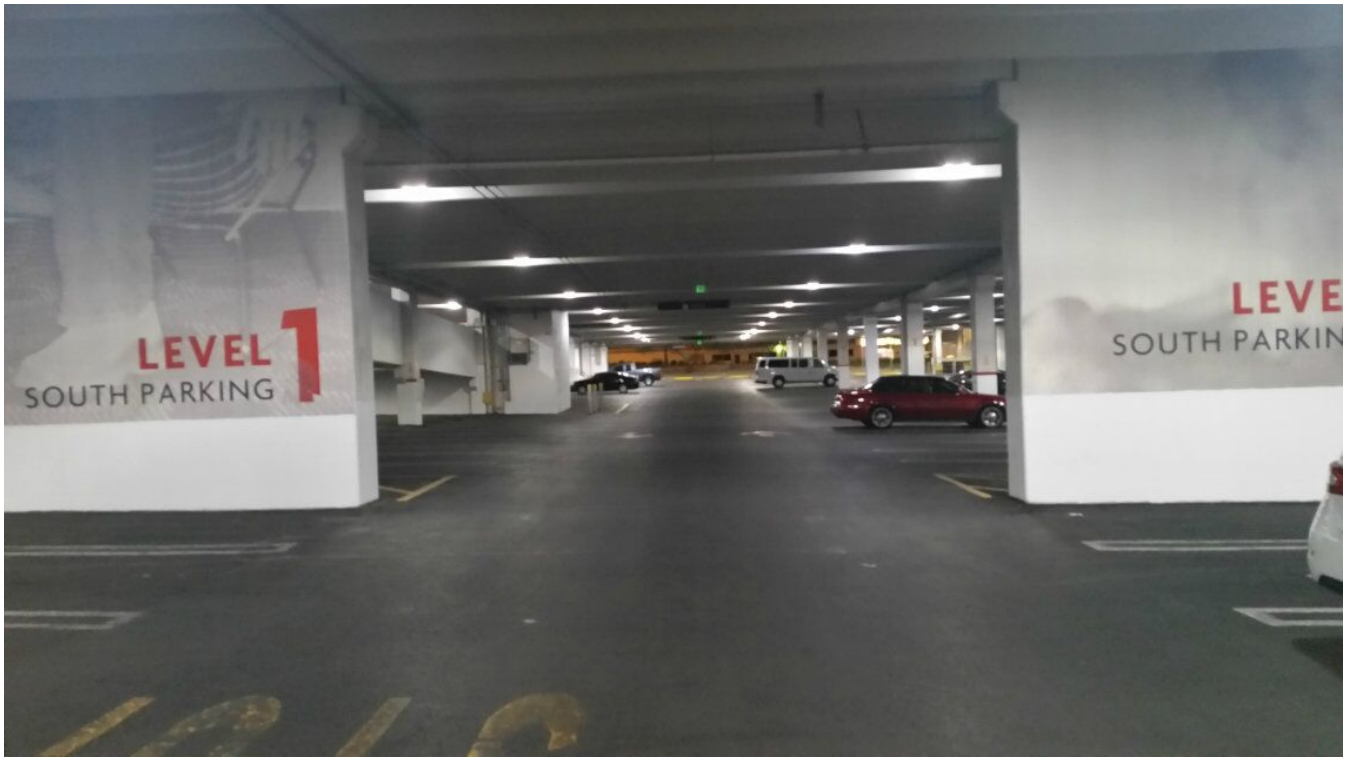

LUMILEDS The Brighter Choice

c UL us LISTED E354939

DLC PREMIUM

5 YEAR

WET LOCATION

GL LED LLC
501 W 18th St, Chicago, IL 60616
WWW.GLLEDLLC.COM
312.600.9363

Specifications

Unit : inch(mm)

Structure Features

- Shell materials: Aluminum & PC.
- Finish: Dark Bronze/White
- Net weight : 4.228Kg (9.32 lbs) Product
- Product Size:14"*14"*4.3"
- Carton Size:16.88"*16.88"*6.53"
- Patent no.:201730117181.0

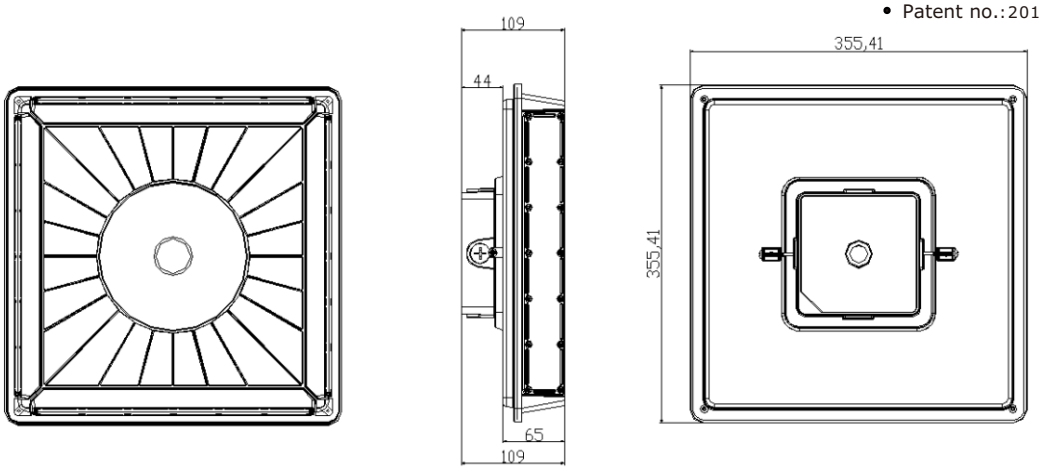

Technical Parameters

GL-PGC07W27-XXK-[D,W]-[blank,M]			
Power	70W	Lighting Angle	274°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45℃
Luminous Flux	8117 Lm	Storage Temperature	-40 -+80℃
Color Temperature	3000/4000K/5000K	Protection Level	Wet Location/IP65
CRI	Ra>80	Cable	Input Connect, 0.3m
Uplight	15%	Dimmable	1-10Vdc

Photometry

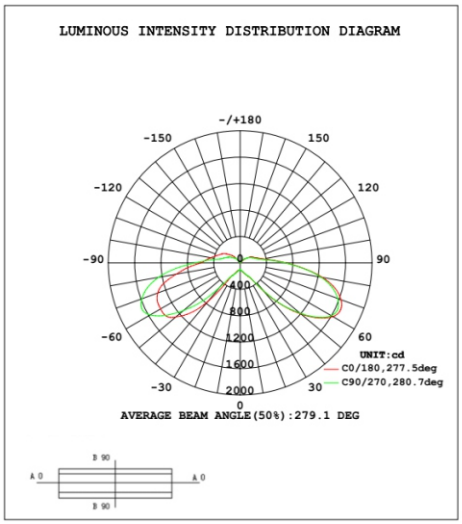

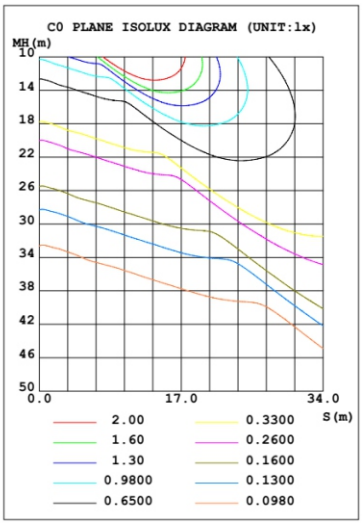

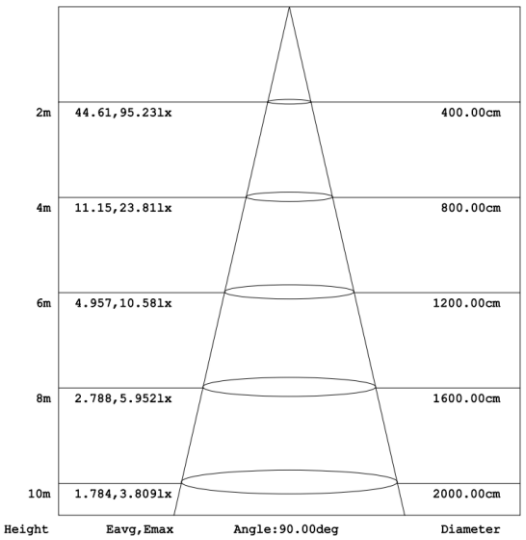

Example:GL-PGC07W27-XXK-[D,W]-[blank,M]						
GL	PGC	07W	27	XXK	D	M
Conmpany	Product	Power	Voltage	Color Temp	Finish	Motion sensor
	PGC	07W(70W)	27	30K(3000K)	D	M
GL LED	Parking Garage		AC120-277V	40K(4000K)	**Dark Bronze**	Motion sensor
	Canopy			**50K(5000K)**	W	
					White	

GL LED LLC
501 W 18th St, Chicago, IL 60616
WWW.GLLEDLLC.COM
312.600.9363