## Motion Sensor Switch - K1021

• The Motion Sensor Switch is used in an environment where the light is needed to be turned on/off automatically with motion detecting. It is widely used in bathrooms, staircases, hallway, or any places need motion light.
• This product only can be used for low-voltage LED light circuits.





## Specification

| | |
|---|---|
| **Input Voltage** | 12-24VDC |
| **Maximum Load Power** | 12V - 24W<br>24V - 48W |
| **Sensor Range** | 140° /0-12ft (0-3m) |
| **Light-up Time** | 35s |
| **Color** | White |
| **Protection** | IP20 Dry Location |
| **Technology** | Infrared photoelectric |
| **Operate Temperature** | 23F-104F (-5C~40C) |
| **Installation Method** | Surface |

**Dimension (unit: inches):**

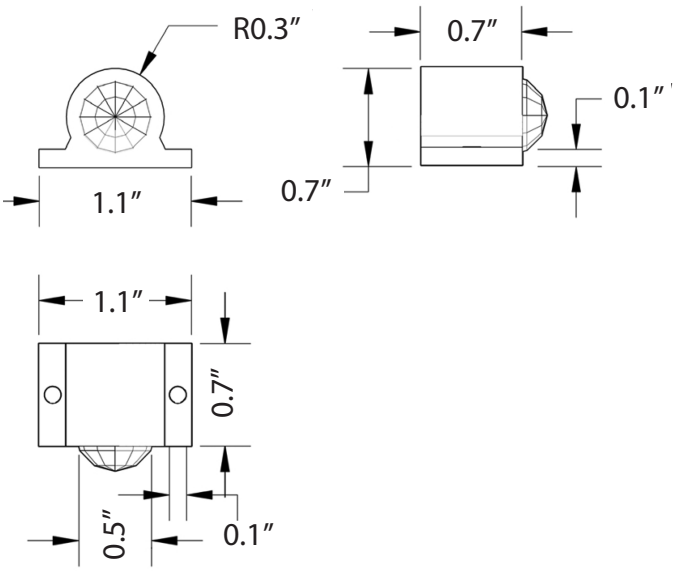


## Detection Range

Range Angle: 140°
Range Distance: 0-12ft

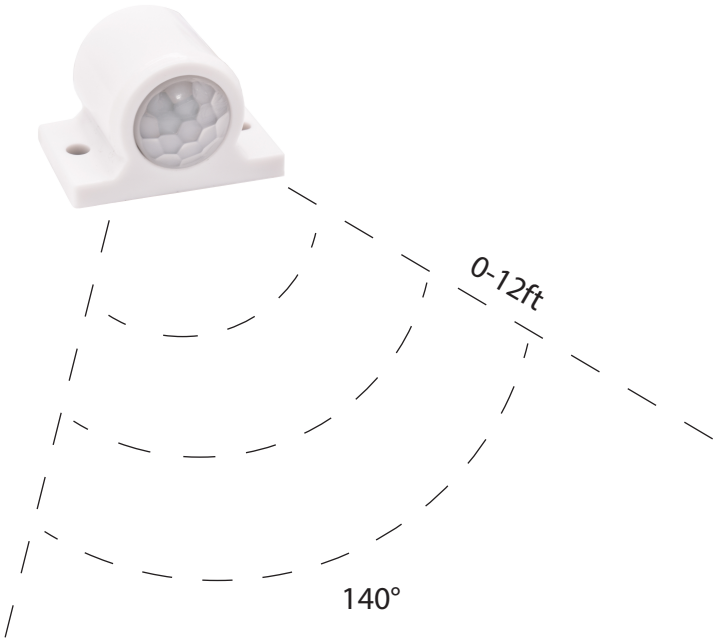


GL LED LLC reserves the right to modify this specification without prior notices.

Copyright © GLLEDLLC 11/20



www.GLLEDLLC.com | 312-600-9363 | admin@glledllc.com

## Demontration

1. Don't install in a place with strong wind and heat to avoid any false triggering.
2. The sensor is not waterproof; don't install it in any place with heavy water and humidity.

1. Install the Motion Sensor Switch K1021 at the requirement location.

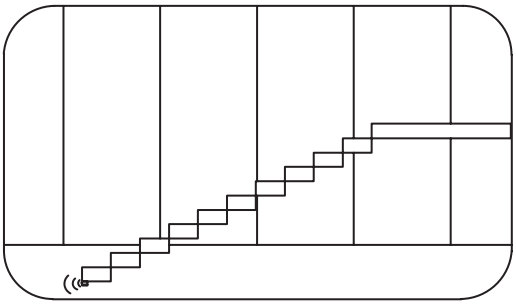

2. When a motion is detected, the light will turn on automatically.

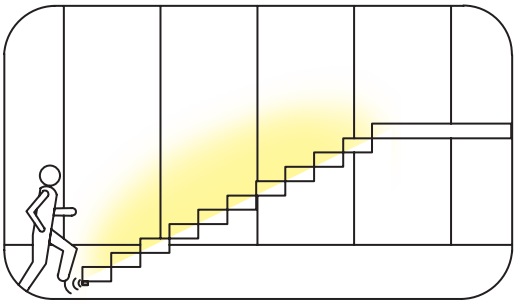

3. The light will keep on for 35s since the last motion detecting.

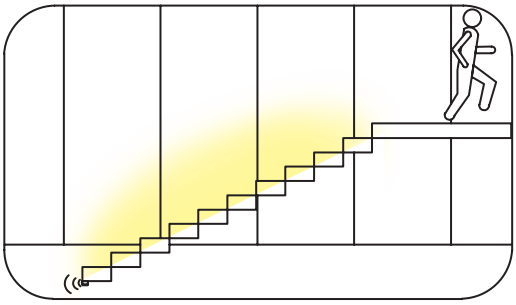

4. The will turn off automitically with no motion detecting.

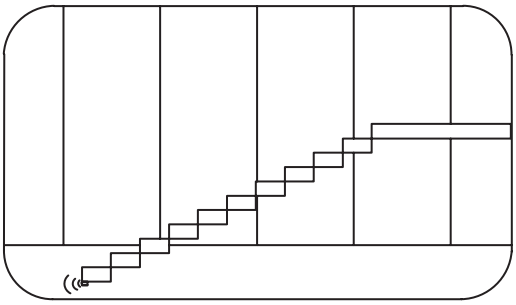

GL LED LLC reserves the right to modify this specification without prior notices.

Copyright © GLLEDLLC 11/20



www.GLLEDLLC.com | 312-600-9363 | admin@glledllc.com